




PIN	SYMBOL
1	VSS
2	VDD
3	C86
4	D7
5	D6
6	D5
7	D4
8	D3
9	D2
10	D1
11	D0
12	/RD
13	/WR
14	A0
15	/RES
16	/CS
17	LEDA
18	LEDK

说明: 串、并选择脚在PCB背面, 上短为串口。

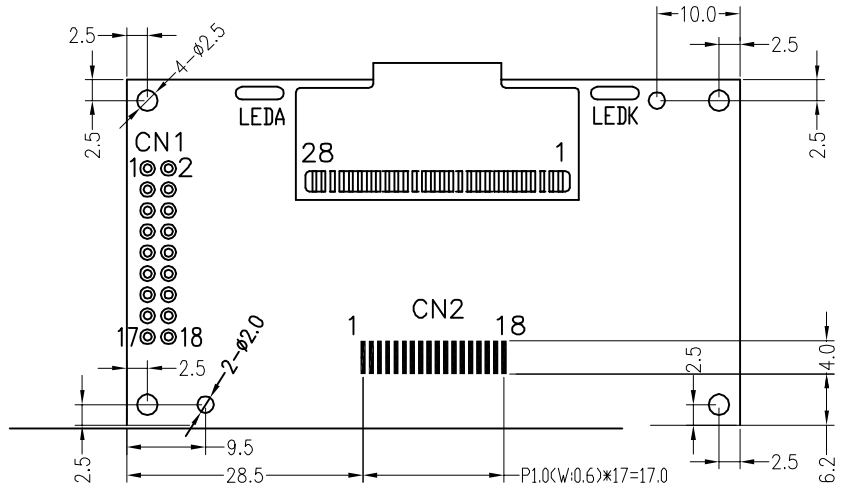

*1. LCD Display Type	FSTN,Positive,Transflective		
*2. Viewing Direction	6H	*6. Storage Temp	-10°C~60°C
*3. Driver Model	Duty:1/65,Bias:1/9	*7. Driver IC	ST7565R
*4. Operating Voltage	3.3V	*8. Backlight	White
*5. Operating Temp	0°C~50°C	*9. Interfcae	8BitsP80/P68/S



HOT DISPLAY

Dwg Title: HTM13264C-30W-N3P-V01

Dwg No: 10100210 Date: 2015-05-05

Scale: 1/2 Unit: mm Tol: ±0.3

Drawn: RD01 Checked: Andyi Ver: A/1