
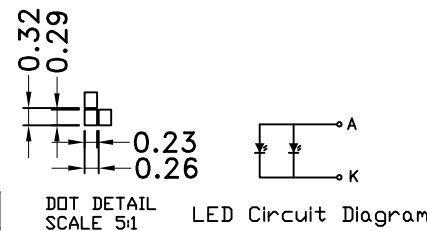


PIN	SYMBOL	PIN	SYMBOL
1	CS1	15	N/C
2	RES	16	N/C
3	A0	17	V0
4	WR	18	XV0
5	RD	19	N/C
6	D0	20	N/C
7	D1	21	VG
8	D2	22	N/C
9	D3	23	N/C
10	D4	24	N/C
11	D5	25	N/C
12	D6	26	C86
13	D7	27	P/S
14	VSS	28	VDD



HOT DISPLAY

*1. LCD Display Type	FSTN,Transflective,Positive		
*2. Viewing Direction	6H	*6. Storage Temp	-30°C~80°C
*3. LCD Driver Mode	1/64Duty,1/9Bias	*7. Driver IC	ST7567
*4. Operating Voltage	3.3V	*8. Backlight	WHITE If=30mA Vf=3.0v
*5. Operating Temp	-20°C~70°C	*9. RDHS	

Dwg Title: HTG12864C-31W-28C05-V63-7567			
EDC No:		Ver: A/0	
Scale 1:1	Unit mm	Tol. ±0.3	
Drawn	Checked	Date: 2016-06-23	