



| Terminal No. | Pin Name |
|--------------|----------|
| 1 | VSS |
| 2 | VDD |
| 3 | V0 |
| 4 | RS |
| 5 | R/W |
| 6 | E |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | BLA |
| 16 | BLK |

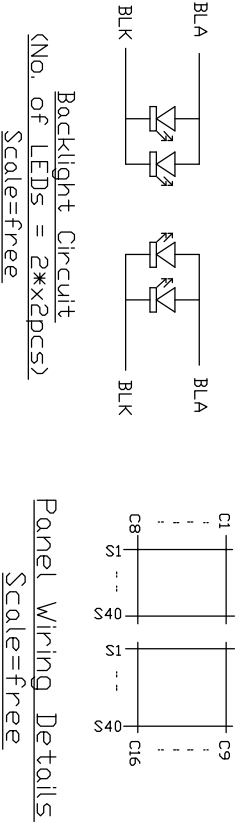

Backlight Circuit
 (No. of LEDs = 2* x^2 DCS)
 Scale=free

Panel Wiring Details
 Scale=free

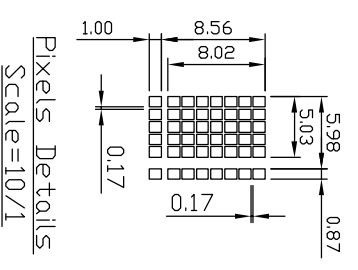

Pixels Details
 Scale=10/1

| | |
|-----------------------|---------------------------------|
| *1. LCD Display Type | STN-Blue Negative Transmissive, |
| *2. Viewing Direction | 6H |
| *3. LCD Driver Mode | 1/16Duty,1/5Bias |
| *4. Operating Voltage | 5.0V,VLCD=4.5V |
| *5. Operating Temp | -0°C~50°C |
| *6. Storage Temp | -10°C~60°C |
| *7. Driver IC | SPLD780D-001B-0C |
| *8. Backlight | White |
| *9. Rose | YES |

HOT DISPLAY

Dwg Title: HTM1601C-25W-ASP

Material No: 10300085 Ver: A/0 Date: 2014-07-18

Scale: 1/1 Unit: mm Tol: ±0.5

Drawn: Andy! Checked: Approved: