


***为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案。如果LCD需要显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。
***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

Drawing Font: Bold

[illegible]

D	观看方向/角度 Viewing Direction	12 0'Clock (U45/D20/R45/L45)	TFT 工作温度 TFT Operating Temp	-20 °C ~ +70 °C
	接口 Interface	SPI 3L/4L	TFT 储存温度 TFT Storage Temp	-30 °C ~ +80 °C
	工作电压 Operating Voltage	VCI = 2.5~3.3V	背光驱动条件 Backlight conditions	Built-in driver circuit
	驱动芯片 Driver IC	ST7735S	液晶模组亮度 LCM Brightness	850 cd/m ² (Typ)/恒流测试

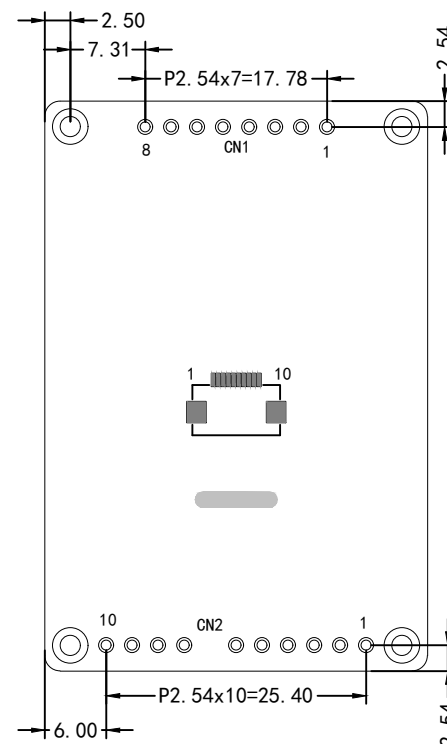

产品型号 Product model		HTM-H017A3-SPI-V0							
比例 Scale		1:1		设计制图 Design		日期 Date		2025-05-27	
版本 Ver		V0-0		单位 Unit		MM		公差 Tol.	
						±0.3			