
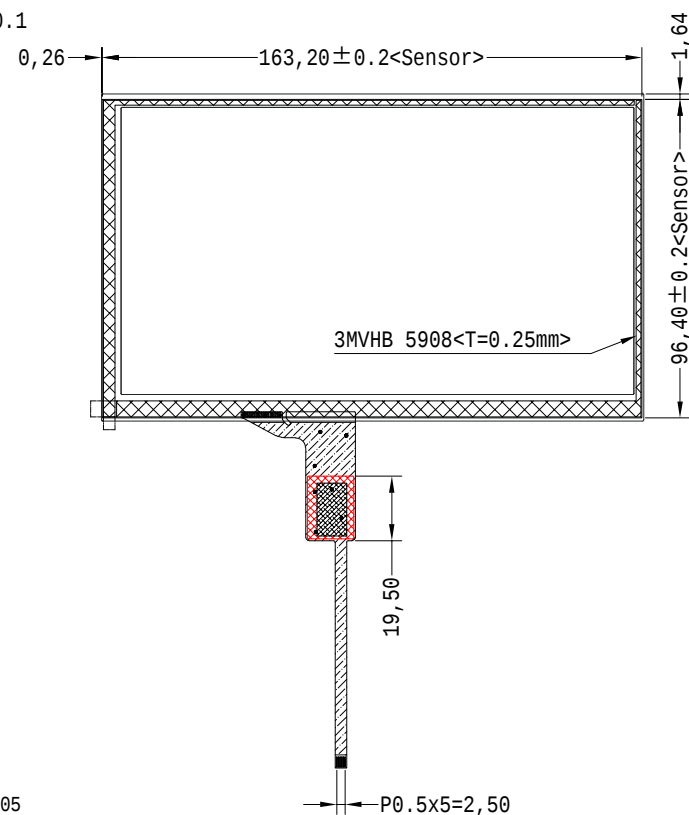


Front view

Side view

Back view

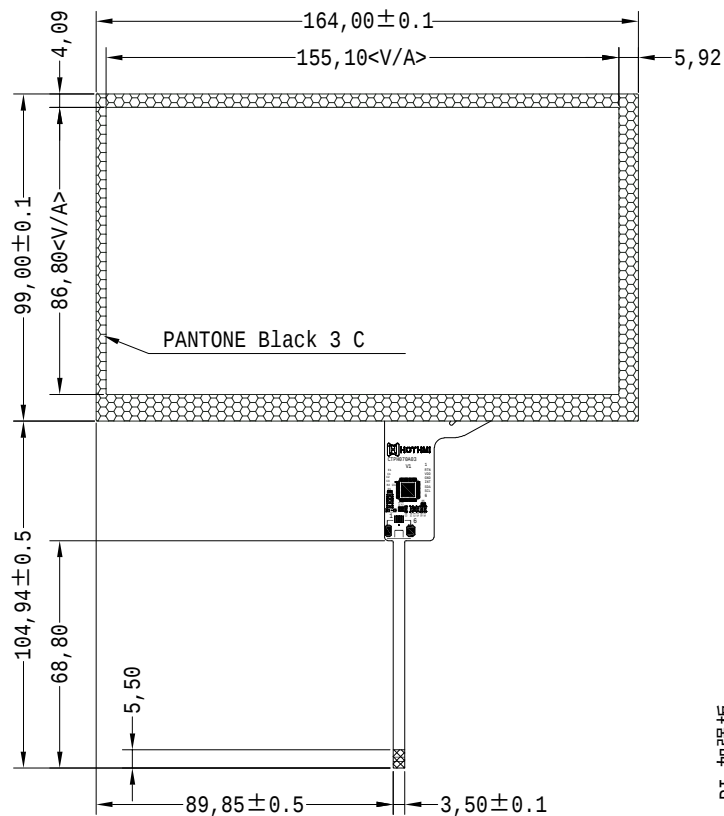

6Pin_SIGNAL	
1	RTN
2	VDD
3	GND
4	INT
5	SDA
6	SCL

触摸构成 Touch constitute	Glass+Glass/总厚度: 1.6±0.1mm(不含背胶)		
联接方式 Connection method	FFC/6P 连接器/0.5MM间距	表面硬度 Surface hardness	6H
接口 Interface	IIC	驱动芯片 Driver IC	GT911
工作电压 Operating Voltage	VDD=3.3V, IOVDD=3.3V(Typ)	CTP 工作环境 CTP working environment	-20℃ ~ 70℃ , ≤90%RH
透光率 Transmittance	≥85%	CTP 储存环境 CTP Storage environment	-30℃ ~ 80℃ , ≤90%RH



产品型号 Product model		CTP-H070A03	
比例 Scale	1:1	设计制图 Design	Liu.YL 日期 Date 2024-04-16
版本 Ver	V1	单位 Unit	MM 公差 Tol. ± 0.2
			