

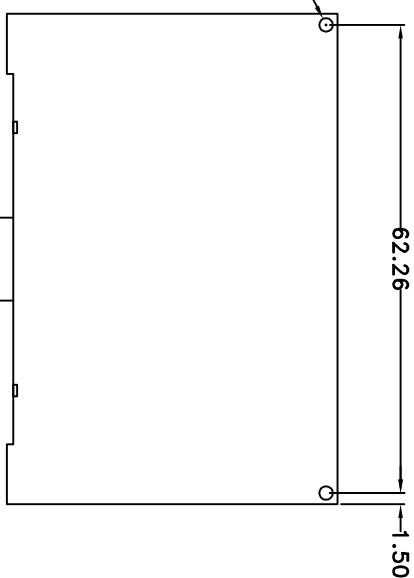
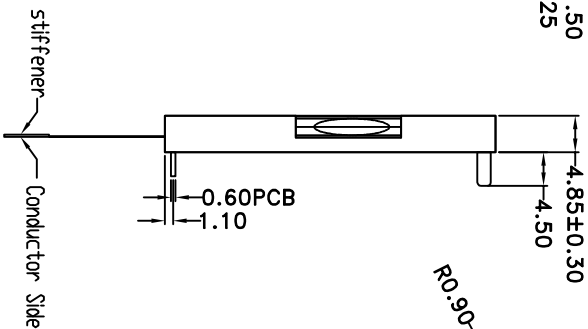
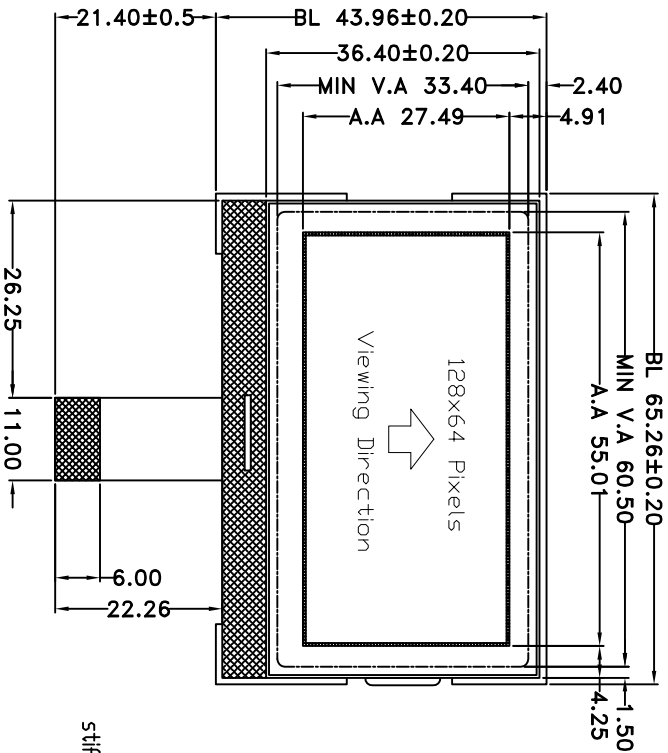






PIN	SYMBOL
1	CS
2	/RES
3	A0
4	SCLK
5	SDA
6	VDD
7	VSS
8	V0
9	XV0
10	VG

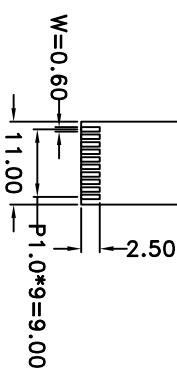

*1. LCD Display Type	FSTN, Transflective, Positive
*2. Viewing Direction	6H
*3. LCD Driver Mode	1/64 Duty, 1/9 Bias
*4. Operating Voltage	3.3V
*5. Operating Temp	-20°C~70°C
*6. Storage Temp	-30°C~80°C
*7. Driver IC	ST7567
*8. Backlight	WHITE Vf=3.0V If=45mA
*9. RDHS	

HOT DISPLAY

Dwg Title: HTG12864-138-31W-10C10-V01

EDC No:

Ver: A/0

Scale: 1:1 Unit: mm Tol: ±0.3

Drawn

Checked

Date: 2025-12-11