

A


B

C

D


## 正视图

Front view

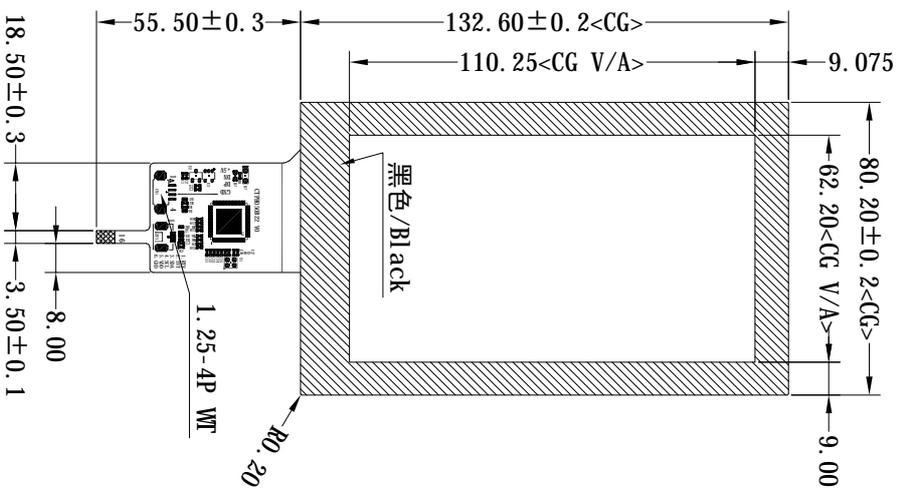


## 侧视图

Side view

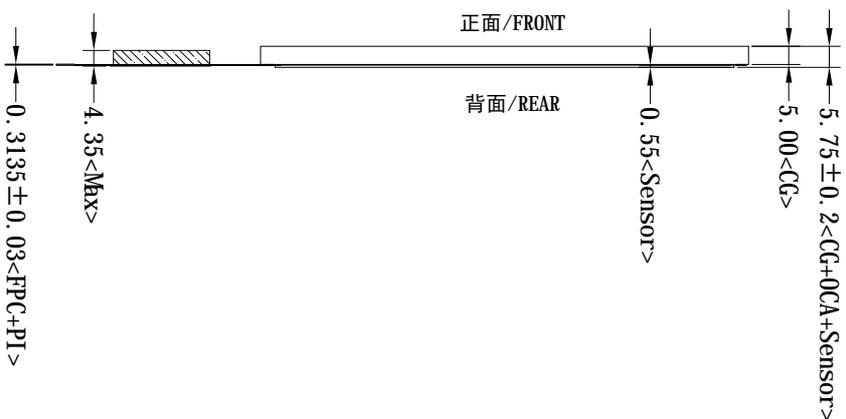

## 背视图

Back view

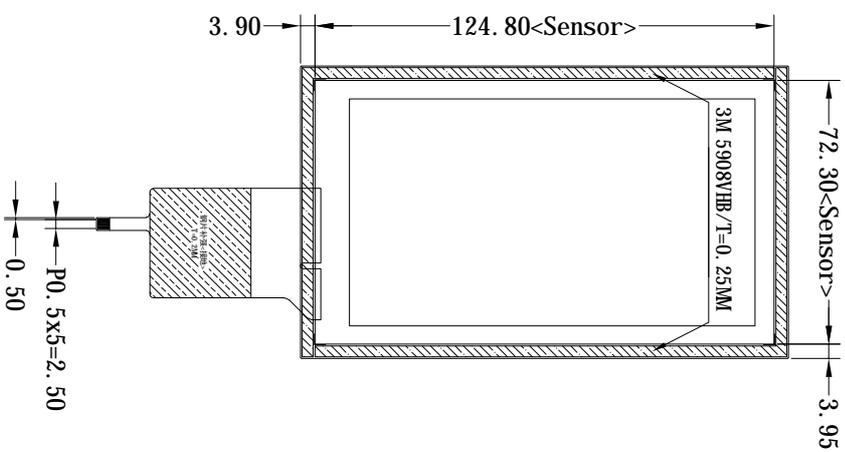

IIC Pin_SIGNAL	
1	R1N
2	INT
3	SDA
4	SCL
5	VDD
6	GND

USB Pin_SIGNAL	
1	+5.0V
2	DN
3	DP
4	GND

D	
触摸构成 Touch constitute	Glass+Glass/总厚度: 5.75±0.2mm(Excludes double-sided tape)
联接方式 Connection method	FPC/插接
接口 Interface	IIC+USB
工作电压 Work voltage	VDD=3.0V+0.3V IICRS5.0V

 <b>HOTIMI</b>	
产品型号 Product model	CTPH050B22
比例 Scale	1:1
设计制图 Design	Li u. YL
日期 Date	2025-11-14