




正视图
Front view

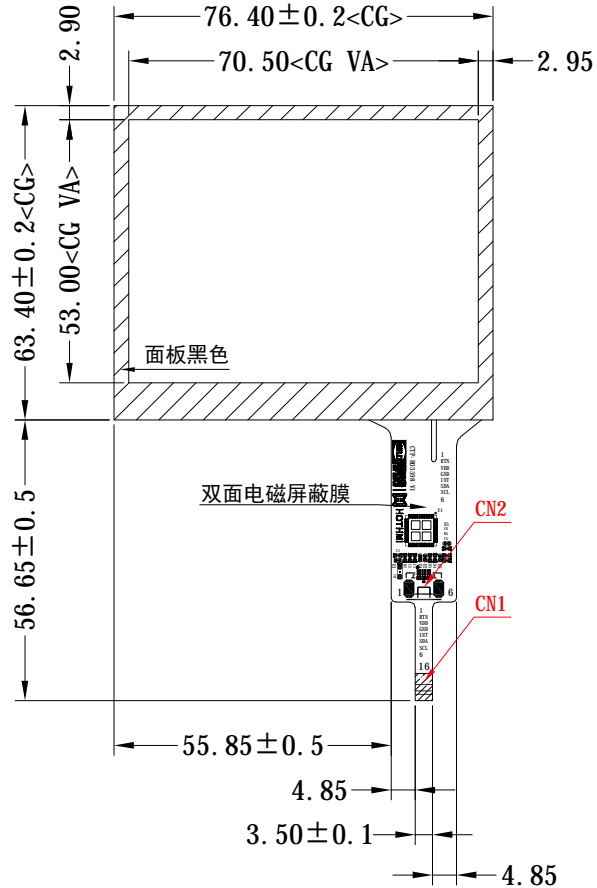

侧视图
Side view

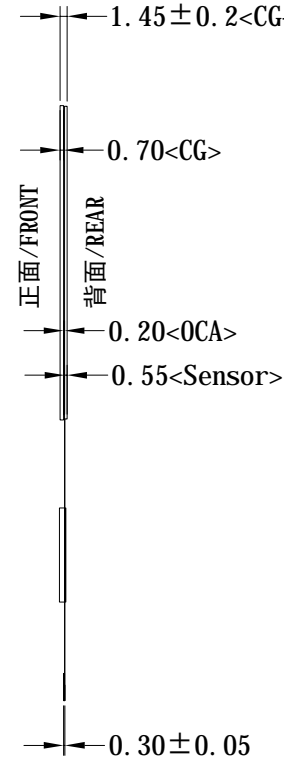

背视图
Back view

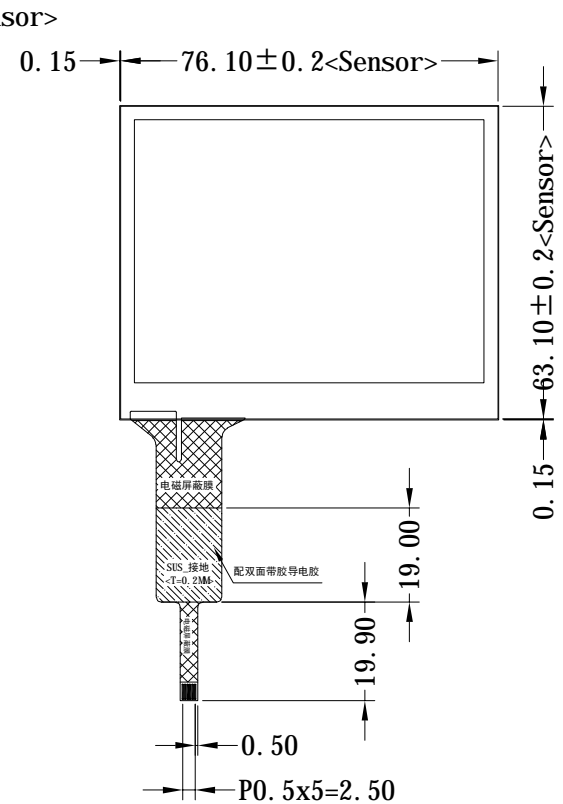

触摸构成 Touch constitute	Glass+Glass/总厚度: $1.6 \pm 0.2\text{mm}$ (不含背胶)		
联接方式 Connection method	FFC/6P/0.5MM间距	表面硬度 Surface hardness	6H
接口 Interface	IIC	驱动芯片 Driver IC	GT1151QM
工作电压 Operating Voltage	VDD=3.0±0.3V	CTP 工作环境 CTP working environment	-20°C ~ 70°C , ≤90%RH
透光率 Transmittance	≥85%	CTP 储存环境 CTP Storage environment	-30°C ~ 80°C , ≤90%RH

CTP CN1_SIGNAL	
1	RTN
2	VDD
3	GND
4	INT
5	SDA
6	SCL

CTP CN2_SIGNAL	
1	VDD
2	INT
3	GND
4	SDA
5	SCL
6	RTN



产品型号 Product model	CTP-H03598		
比例 Scale	1:1	设计制图 Design	Li u. YL
日期 Date	2026-03-31		
版本 Ver	V1-0	单位 Unit	MM
公差 Tol.	±0.2		