


***为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案。如果LCD需要显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。
***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

[illegible]

TFT 观看方向 TFT Viewing Direction	U85/D85/L85/R85	TFT 工作温度 TFT Operating Temp	-20 °C ~ 70 °C
TFT 接口 TFT Interface	4-wire 8-bit SPI<TFT>, IIC<CTP>	TFT 储存温度 TFT Storage Temp	-30 °C ~ 80 °C
工作电压 Operating Voltage	VDD=VCI=3.0±0.3V	背光驱动条件 Backlight conditions	Vf= 3.0±0.3V, If= 40 mA
驱动芯片 Driver IC	GC9A01<TFT>, CST816T<CTP>	液晶模组亮度 LCM Brightness	400±100 cd/m²/恒流测试

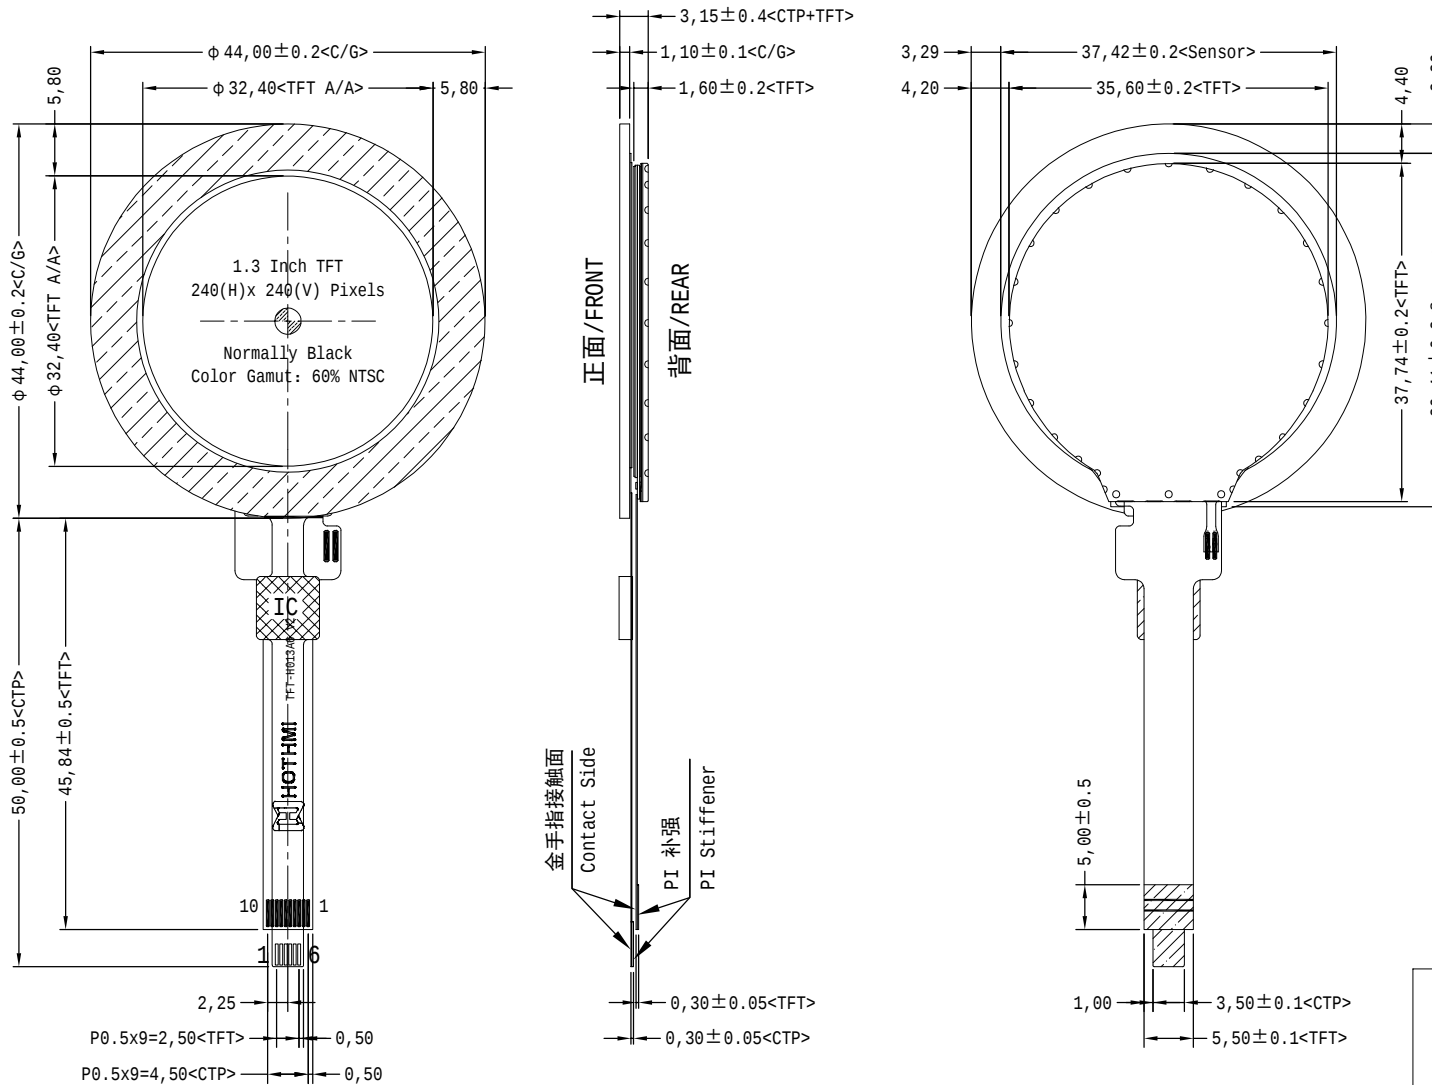

产品型号 Product model					TFT-H013A6QQIGC4C10								
比例 Scale		1:1		设计制图 Design			日期 Date		2026-01-10				
版本 Ver		V2-1		单位 Unit		MM		公差 Tol.		±0.3			