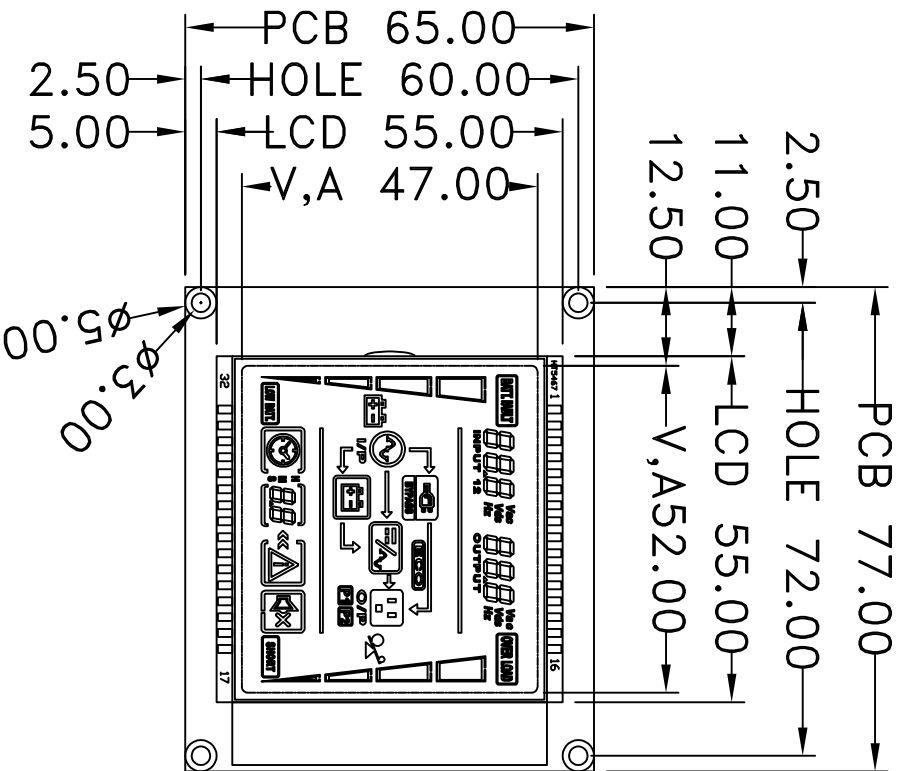


*1. LCD Display Type	STN-BLUE, Transmissive, Negative		
*2. Viewing Direction	6H	*6. Storage Temp	-30°C~80°C
*3. LCD Driver Mode	1/4Duty, 1/3Bias	*7. Driver IC	VKS232A
*4. Operating Voltage	5.0V	*8. Backlight	4PCS WHITE LEDS VF=3.0V IF=80mA
*5. Operating Temp	-20°C~70°C	*9. RDHS	

HOT DISPLAY

Dwg Title		HTMS467	
EDC No		Veri	
Scale	Unit	Tol.	Date
1:1	mm	±0.3	2026-09-01
Drawn		Checked	